


ZIRKONZAHN TYPE_Milling Bur

- Diamond coating to cut Zirconia

2 ZDRB, 3 ZDRB Series

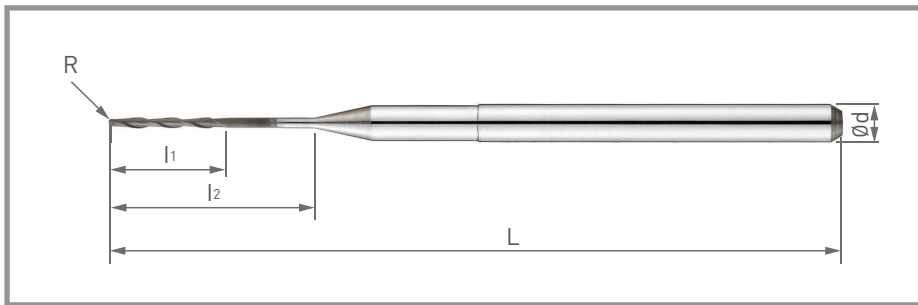

ZIRCONIA

DIA

Coating

R

 ± 0.005

R Tolerance

30°

Helix

2

2 Flutes

3

3 Flutes

SPECIFICATIONS


Model. No	Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Shank Diameter	Overall Length
		R	l_2	l_1	d	L
2ZDRB-005-050-357	2F	0.25	5	3	3	57
2ZDRB-010-160-357		0.5	16	8		
2ZDRB-020-180-357		1	18	10		
2ZDRB-005-050-650		0.25	5	3	6	50
2ZDRB-010-120-650		0.5	12	6		
2ZDRB-020-180-650		1	18	10		
3ZDRB-010-160-357	3F	0.5	16	8	3	57
3ZDRB-020-180-357		1	18	10		
3ZDRB-010-120-650		0.5	12	6	6	50
3ZDRB-020-180-650		1	18	10		

- All items are step type of ZIRKONZAHN

ZIRKONZAHN TYPE_Milling Bur

- Tyson coating based on TiSin to cut Cobalt Chrom & Titanium.

2 ZTRB Series

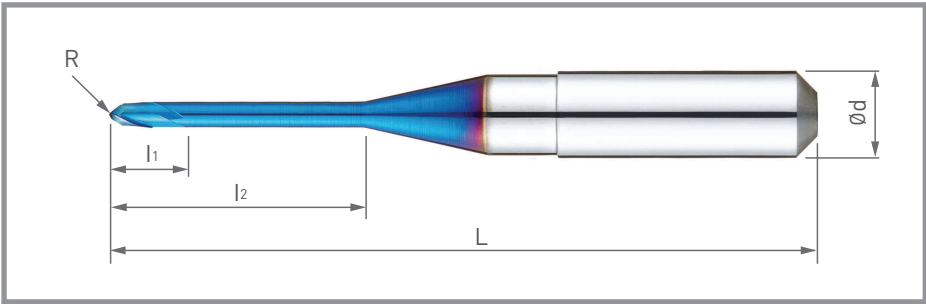

COBALT CHROME,
TITANIUM

TYSON

Coating

R

±0.005

R Tolerance

30°

Helix

2

2 Flutes

SPECIFICATIONS

Model. No	Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Shank Diameter	Overall Length
		R	l ₂	l ₁	d	L
2ZTRB-020-180-650	2F	1	18	3	6	50
2ZTRB-030-180-650		1.5		4		


• All items are step type of ZIRKONZAHN



ZIRKONZAHN TYPE_Milling Bur

- Un-coating for cutting PEEK & PMMA & WAX.

1 ZNRB, 2 ZNRB, 3 ZNRB Series

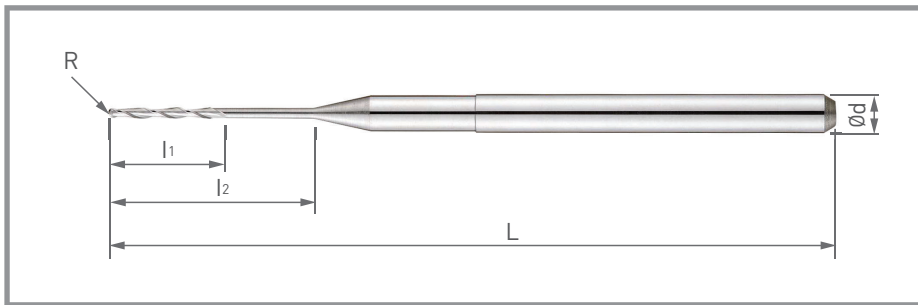

PMMA & PEEK &
WAX

NON
COATING

R
±0.005

30°
Helix

1
1 Flutes

2
2 Flutes

3
3 Flutes

SPECIFICATIONS

Model. No	Flutes	Radius of Ball Nose	Effective Length	Length of Cut	Shank Diameter	Overall Length
		R	l ₂	l ₁	d	L
1ZNRB-005-050-357	1F	0.25	5	3	3	57
1ZNRB-010-160-357		0.5	16	8		
1ZNRB-020-180-357		1	18	10		
1ZNRB-005-050-650		0.25	5	3	6	50
1ZNRB-010-120-650		0.5	12	6		
1ZNRB-020-180-650		1	18	10		
2ZNRB-005-050-357	2F	0.25	5	3	3	57
2ZNRB-010-160-357		0.5	16	8		
2ZNRB-020-180-357		1	18	10		
2ZNRB-005-050-650		0.25	5	3	6	50
2ZNRB-010-120-650		0.5	12	6		
2ZNRB-020-180-650		1	18	10		
3ZNRB-010-160-357	3F	0.5	16	8	3	57
3ZNRB-020-180-357		1	18	10		
3ZNRB-010-120-650		0.5	12	6	6	50
3ZNRB-020-180-650		1	18	10		

- All items are step type of ZIRKONZAHN